



Product Code: EP1440L 10-186

EcoPro G2 1350 Litre Upright Marine Spec Freezer Cabinet



Features & Benefits

- Sleek, modern aesthetics, robust construction and market leading capacity. 'Smartphone style' fuzzy logic II touch sensitive control panel with high visibility temperature display
- Low energy refrigerant system with reduced running costs
- Improved internal fittings for easy cleaning
- Foster Circulair II air distribution system maximises efficient operation even when shelves are fully loaded
- Operates efficiently in ambients up to 32°C
- Includes legs, bulkhead brackets, marine shelves and latch handle
- Features Foster's new award-winning +stayclear condenser, revolutionising the effective operation of your refrigeration, ensuring your equipment works more efficiently for longer

Shelving

| | |
|----------------------------------|--------|
| Additional S/S Trayslides | Option |
| Additional GN2/1 Shelf | Option |

Refrigeration

| | |
|--------------------------------------|----------|
| R290 - Energy Efficient | Standard |
| Integral Refrigeration System | Standard |
| Less Condensing Unit | Option |

Specification

| | |
|------------------------------|----------|
| Freezer -18/-21°C | Standard |
| Width (mm) | 1440 |
| Depth (mm) | 820 |
| Height (mm) | 2123 |
| Unpacked weight (Kgs) | 182.5 |
| Packed weight (Kgs) | 199.1 |
| Gross Volume (Ltr) | 1350 |

Base Fittings

| | |
|---------------------------------|----------|
| Castors 80mm | Standard |
| Legs 150mm | Option |
| Marine Spec Legs - 150mm | Standard |

Electrical & Service Data

| | |
|-----------------------------------|----------|
| Connect Load | 775 |
| 230/50/1 | Standard |
| 220/60/1 Electrical Supply | Option |
| Fuse Required (A) | 10 |
| Refrigerant Charge (kg) | 0.61 |

Finish

| | |
|--|----------|
| 304 s/s | Standard |
| 304 S/S back for island sitting | Option |

Doors

| | |
|-----------------------------------|----------|
| Left and right hinged door | Standard |
| Marine - latch handle | Standard |

Product Extras

| | |
|----------------------------|----------|
| Helicoil Mains Lead | Option |
| Marine Spec | Standard |

Energy

| | |
|---------------------------------|-------------|
| AEC | 4259.327496 |
| Nett Volume | 964.6 |
| Energy Grade | D |
| Global Warming Potential | 3922 |
| Energy Efficiency Index | 68.42 |


Footnotes

- Marine kit option includes legs, bulkhead brackets, marine shelves and latch handle
- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

Energy Performance Data and information



Foster Refrigerator - a division of ITW Ltd
Oldmedow Road, KING'S LYNN, Norfolk PE30 4JU
Tel: +44(0) 1553 691122
Registered in England No. 00559693
VAT No. GB 792 4414 16

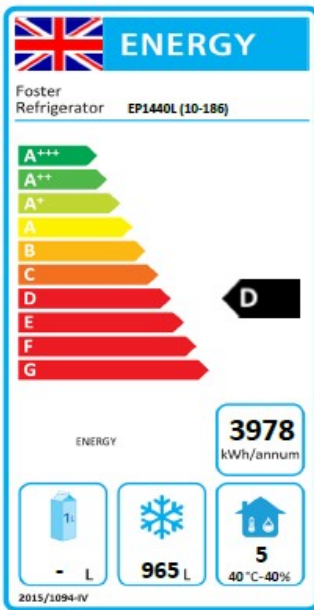

Application

This appliance is intended for use in ambient temperatures up to {1}°C

Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit [our policies](#)



Energy



Quality



Value



Design



Hygiene



After Care

Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU

Phone 08432 168800 | Email sales@foster-uk.com | Visit www.fosterrefrigerator.com

All images shown are for illustration purpose only. All images and photographs are not intended to be relied upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract. Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation shall be contractually binding.