



**Self-contained ice maker - Sprayer system**  
Daily production up to 25 kg

Hotel	████████████████████
Restaurant	████████████████████
Fast food	████████████████████
Bar	████████████████████
Disco	████████████████████
Fish market	████████████████████
Supermarket	████████████████████
Medical & SPA	████████████████████
Industry	████████████████████

► Position n°



► Features & Plus

- Compact and crystal cube
- Tropical class +43°C
- Cleanable antiscaling filter
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- Patented sprayer slide
- Ice dispenser




Cleanable antiscaling filter



Easy cleanable internal rounded surfaces



Patented sprayer slide



Ice dispenser

► Available ice cube size



► Prod. 24h

Air temp.	10° C		50° F		Water temp.	7° C		45° F		kg	25		lbs	55	
	21° C		70° F			15° C		60° F			22			49	
	<div style="background-color: #0070C0; color: white; padding: 5px; text-align: center;"> <b>2 Years Warranty</b> subject to limitations                 </div>														

► Certifications available for this model






Ice Cube

# HIKU 26



## Self-contained ice maker - Sprayer system Daily production up to 25 kg

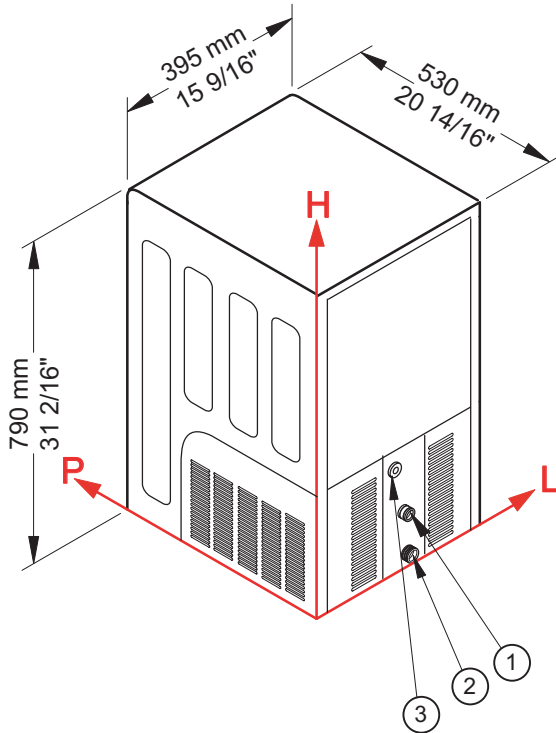

### ► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### ► Performances

	Air temperature	Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
	10° C	25 kg					
	50° F		55 lbs				
	21° C			22 kg			
	70° F				49 lbs		
	32° C					18 kg	
	90° F						40 lbs

### ► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 191 mm / 7 8/16" - 136 mm / 5 6/16" - 3/4"      ② Water out.: 197 mm / 7 12/16" - 36 mm / 1 7/16" - 24 mm / 15/16"  
 ③ Electrical connections: 175 mm / 6 14/16" - 211 mm / 8 5/16"

### ► Technical information

Production in 24h	22 kg / 49 lbs	Water consumption	A: 4,5 l/kg - 53,9 gal/100 lbs
Store capacity, up to	7 kg / 15 lbs	Sizes (L-P-H mm)	395 - 530 - 790
Cooling system	A	(L-P-H ")	15 9/16 - 20 14/16 - 31 2/16
Kind of cube	D-13g	Sizes with pack (L-P-H mm)	430 - 580 - 970
Refrigerant	R404A - R452A	(L-P-H ")	16 15/16 - 22 13/16 - 38 3/16
Standard voltage	220-240 V ~ 50 Hz	Net weight	41 kg / 90 lbs
Average power consumption	250 W	Gross weight	48 kg / 106 lbs
Fuse	10 A	Finish	Polyethylene
Delivered ice	1,3 kg/min		

All the technical information must be considered at the following conditions:

- Sizes without feet
- Standard Cube (13 g)
- Ambient temperature +21° C
- Water temperature +15° C
- Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 04 - Issued September 2019



[www.bremaice.it](http://www.bremaice.it)  
[info@bremaice.it](mailto:info@bremaice.it)

Bim + Data  
download

